


## INTERCOMS CONNECTED TO A DOOR STATION SERIES MODY (1+1 system).

### COMBINÉS BRANCHÉS À UN POSTE DE RUE SÉRIE MODY (installation 1+1).

Connection of privacy module **SM50** in **PT511SW/1** intercom.

*Branchement du module de secret **SM50** dans le combiné **PT511SW/1**.*

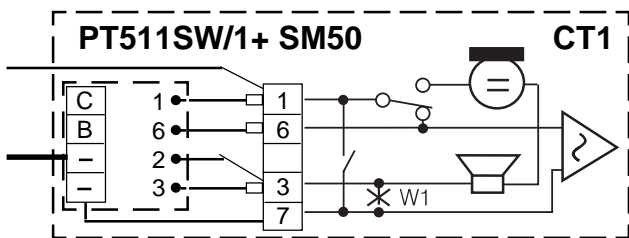

In each intercom it is necessary:

- to cut the jumper (**W1**) that links the terminals 3 and 7;
- to activate the connection between terminal 7 of the intercom and the - (minus) of the private conversation module.

*Dans chaque combiné, il faut:*

- **couper le branchement mobile (W1)** qui unit les bornes 3 et 7;
- effectuer le branchement entre la borne 7 du combiné et le - (moins) du module de secret.

#### Cable cross section

#### Section des conducteurs

Distance		Section	
m.	Ft.	mm <sup>2</sup>	AWG
50	164	0.75	18
100	330	1	18
200	660	1.5	16

